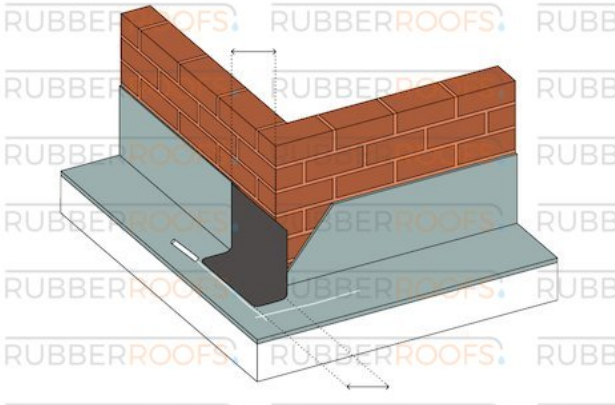
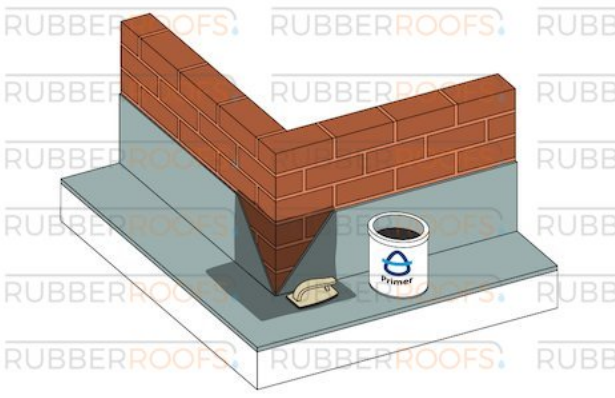
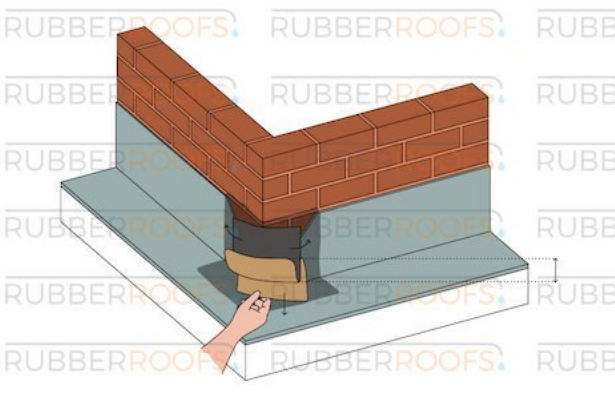
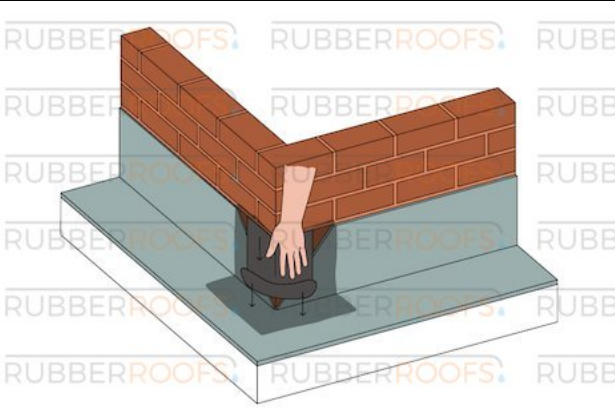
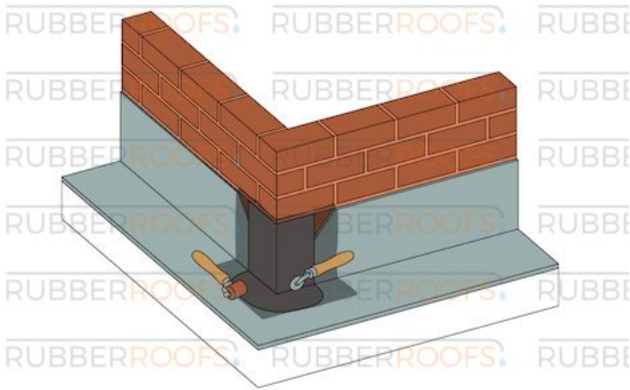



External Corner

A guide to installing an external corner.


 An isometric diagram of an external corner where a brick wall meets a flat roof. A black rubber flashing is being applied to the corner. Dashed lines and arrows indicate the dimensions: 'A' is the width of the flashing on the wall (85mm) and 'B' is the width on the roof (135mm).	<p>Step 1</p> <p>Mark rubber as shown with crayon or similar. A should be 85mm and B should be 135mm.</p>
 An isometric diagram of the same external corner. A small white bucket labeled 'Primer' and a yellow brush are shown. The primer is being applied to the brickwork and the rubber flashing.	<p>Step 2</p> <p>Prime brickwork and rubber with quick scrubber and handle and allow to dry.</p>
 An isometric diagram of the external corner. A hand is shown folding up the bottom edge of the black rubber flashing by 6cm. The flashing is being positioned over the corner joint.	<p>Step 3</p> <p>Fold up the bottom of 9" flashing by 6cm and carefully remove the rear section of release paper. Start from the top, centralise and adhere in place, ensuring that the folded up 6cm section will finish neatly at the bottom. Once in place, the folded-up section will be self-supporting and will allow you to remove the rest of the release paper.</p>
 An isometric diagram of the external corner. A hand is shown pressing the black rubber flashing tape down the brick wall and stretching it onto the roof surface. The flashing is being secured into the corner joint.	<p>Step 4</p> <p>Using fingers, gently dress the flashing tape down the wall towards the deck paying extra attention to ensure it is tight into the angle change. Still using fingers, gently stretch the flashing tape, 1cm at a time, onto the roof. This will form a neat semi-circle. A gentle heat source such as a hot air gun is useful in cold conditions.</p>

**Step 5**

Use a silicone and penny roller to ensure properly mated, paying attention to the angle change.

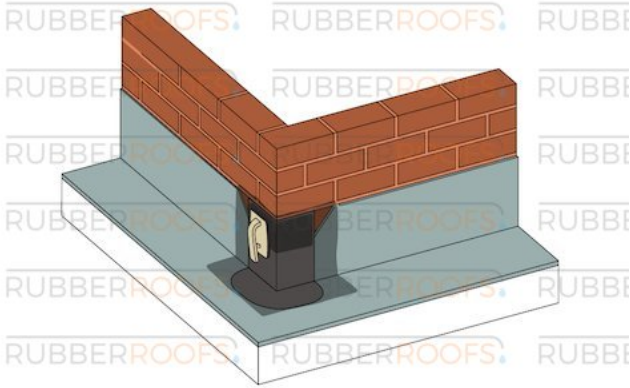**Step 6**

If there are gaps at the top of the corner detail use additional 9" flashing tape and primer.

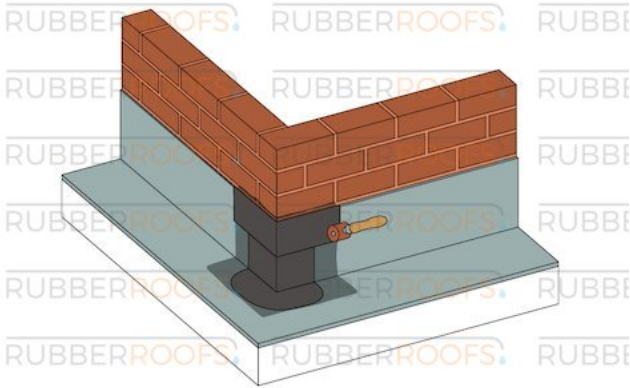**Step 7**

Thoroughly roller.